

12V12Ah @ 20HR

Rekoser AGM Battery for General Purpose

AGM Battery. Rekoser stationary series, general use, has been specially designed to optimize its life and quality, minimizing maintenance and maximizing self discharge of their properties for longer storage. RKE series is ideal for security and alarm systems, UPS systems, emergency light systems and other small backup applications.




Complied standards

- IEC 60896-21/22
- JIS C8704
- GB/T19639




TERMINAL F2



SPECIFICATIONS				
Nominal Voltage	12V			
Capacity (25°C)	12Ah @ 20HR			
Internal Resistance	Fully Charged 25 m Ω			
Self Discharge	3% of capacity declined per month at 20°C			
Cell number	6 cells			
Capacity Affected by Temperature	102% (40°C)	100% (25°C)	85% (0°C)	65% (-15°C)
Charge Voltage (25°C)	Cycle - 14.6-14.8V (-30mV/C), max. Current 2.1A		Float - 13.6-13.8V (-20mV/C)	
Max. Charge Current	3.6A			
Max. Discharge Current	180A			

DIMENSIONS AND WEIGHT	
Dimensions (mm)	151x98x95(101)
Weight (kgs)	3.6

CONSTRUCTION	
Component	Raw Material
Positive	Lead dioxide
Negative	Lead
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Sealant	Epoxy Resin
Safety Valve	Rubber
Terminal	Copper
Separator	Fibre Glass
Electrolyte	Sulphuric acid

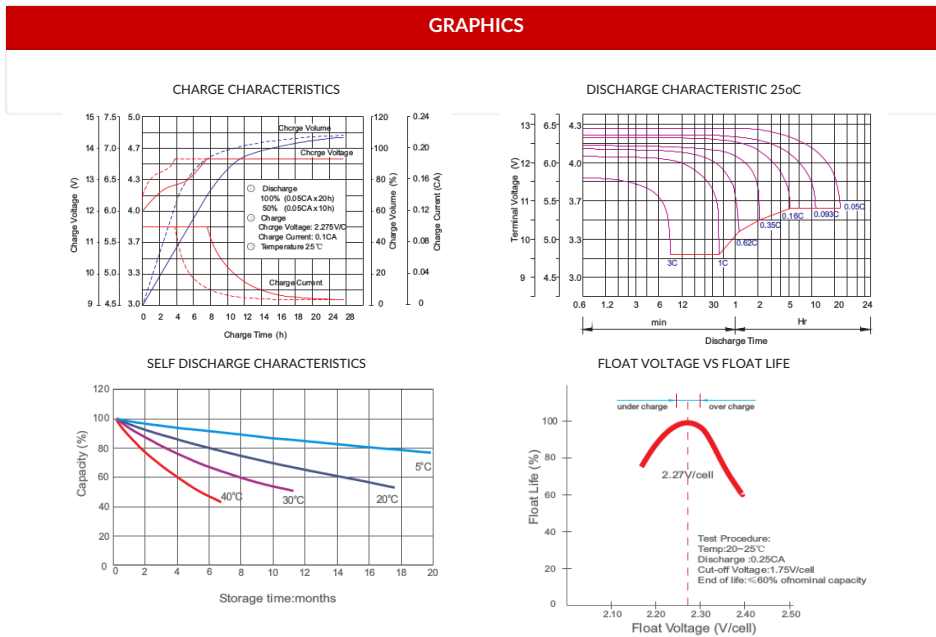

CONSTANT DISCHARGE RATINGS (A, W) AT 25°C																		
F.V / Time	5MIN		10MIN		15MIN		30MIN		1HR		3HR		5HR		10HR		20HR	
11.10 V	30.0A	56.4W	23.5A	44.6W	19.9A	38.0W	12.2A	23.5W	7.28A	14.1W	3.16A	6.2W	2.03A	4.02W	1.12A	2.24W	0.57A	1.15W
10.80 V	33.9A	62.7W	24.9A	46.7W	20.4A	38.6W	12.5A	23.8W	7.39A	14.2W	3.19A	6.22W	2.05A	4.03W	1.13A	2.25W	0.59A	1.17W
10.50 V	37.8A	69.1W	26.3A	48.9W	20.9A	39.1W	12.7A	24.0W	7.55A	14.4W	3.24A	6.26W	2.08A	4.04W	1.15A	2.26W	0.6A	1.19W
10.20 V	41.5A	74.8W	27.6A	50.6W	21.4A	39.7W	13.0A	24.3W	7.68A	14.5W	3.28A	6.27W	2.1A	4.07W	1.16A	2.27W	0.61A	1.21W
10.02 V	44.7A	79.7W	28.8A	52.3W	22.0A	40.4W	13.2A	24.6W	7.8A	14.6W	3.31A	6.28W	2.13A	4.09W	1.17A	2.28W	0.63A	1.22W
9.60 V	48.1A	84.7W	29.8A	53.6W	22.8A	41.5W	13.5A	25.0W	7.9A	14.7W	3.34A	6.31W	2.16A	4.11W	1.19A	2.3W	0.64A	1.23W