

12V20Ah @ 20HR


Rekoser AGM Battery for General Purpose

AGM Battery. Rekoser stationary series, general use, has been specially designed to optimize its life and quality, minimizing maintenance and maximizing self discharge of their properties for longer storage. RKE series is ideal for security and alarm systems, UPS systems, emergency light systems and other small backup applications.



Complied standards


- IEC 60896-21/22
- JIS C8704
- GB/T19639

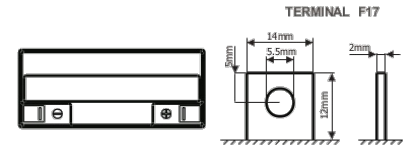

SPECIFICATIONS				
Nominal Voltage	12V			
Capacity (25°C)	20Ah @ 20HR			
Internal Resistance	Fully Charged 25 m Ω			
Self Discharge	3% of capacity declined per month at 25°C			
Cell number	6 cells			
Capacity Affected by Temperature	102% (40°C)	100% (25°C)	85% (0°C)	65% (-15°C)
Charge Voltage (25°C)	Cycle - 14.6-14.8V (-30mV/C), max. Current 2.1A		Float - 13.6-13.8V (-20mV/C)	
Max. Charge Current	6.0A			
Max. Discharge Current	270A			

DIMENSIONS AND WEIGHT	
Dimensions (mm)	181x77x167(167)
Weight (kgs)	5.7

CONSTRUCTION	
Component	Raw Material
Positive	Lead dioxide
Negative	Lead
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Sealant	Epoxy Resin
Safety Valve	Rubber
Terminal	Copper
Separator	Fibre Glass
Electrolyte	Sulphuric acid

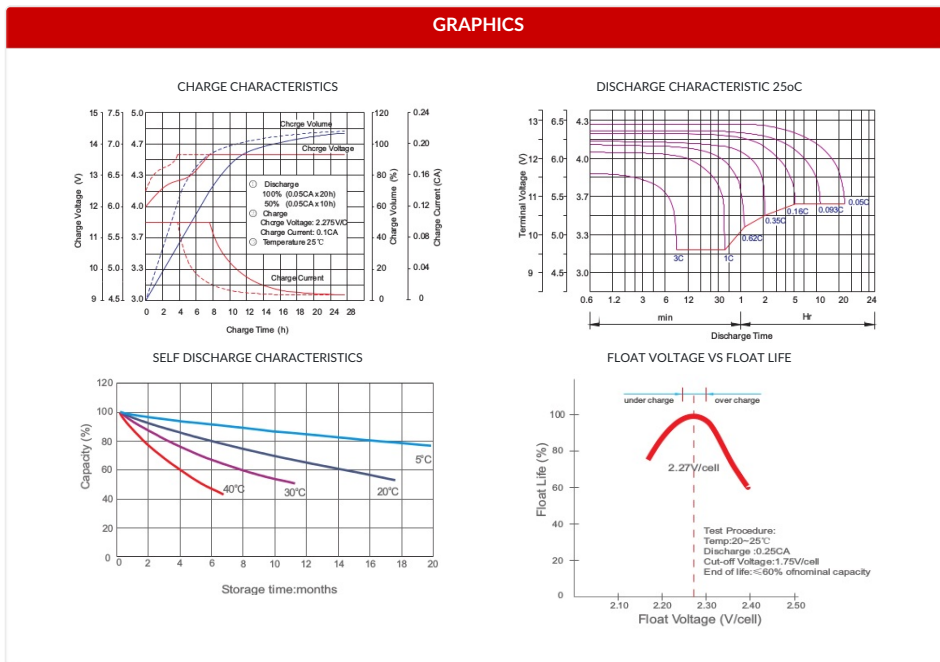

CONSTANT DISCHARGE RATINGS (A, W) AT 25°C

F.V / Time	5MIN		10MIN		15MIN		30MIN		1HR		3HR		5HR		10HR		20HR	
11.10 V	49.9A	94.0W	39.1A	74.3W	33.1A	63.3W	20.4A	39.2W	12.1A	23.5W	5.26A	10.3W	3.39A	6.7W	1.89A	3.73W	0.95A	1.92W
10.80 V	56.5A	105W	41.5A	77.9W	34.0A	64.3W	20.8A	39.6W	12.3A	23.7W	5.32A	10.4W	3.42A	6.71W	1.89A	3.75W	0.98A	1.95W
10.50 V	63.0A	115W	43.9A	81.5W	34.8A	65.2W	21.2A	40.0W	12.6A	23.9W	5.41A	10.4W	3.46A	6.74W	1.91A	3.77W	1.0A	1.99W
10.20 V	69.1A	125W	45.9	84.3A	35.7A	66.2W	21.7A	40.6W	12.8A	24.2W	5.46A	10.5W	3.51A	6.78W	1.93A	3.79W	1.02A	2.01W
10.02 V	74.5A	133W	48.0A	87.2W	36.6A	67.3W	22.0A	41.0W	13.0A	24.4W	5.51A	10.5W	3.56A	6.81W	1.96A	3.8W	1.04A	2.04W
9.60 V	80.2A	141W	49.7A	89.3W	37.9A	69.2W	22.6A	41.7W	13.2A	24.5W	5.57A	10.5W	3.6A	6.84W	1.98A	3.83W	1.06A	2.06W